

Specification Approval Sheet

Product : Lithium Polymer Battery pack

Model : GMB12210215

Spec : GMB0908010057

Agree	Check	Make

confirmation	Sign	Date
	Company :	
	Stamp :	

Content

1. Scope	4
2. Battery pack signature and function.....	4
3. PCM performance	5
3.1. Environment.....	5
3.2. Electronic performance para.....	5
3.3. PCM function	5
4. Primary parameter for Charger	7
5. Cell assemble drawing	7
6. Cell parameter index	7
7. Battery pack guideline	9
8. Special remind.....	10
9. Transport	10
10. Declaration	10

Any copies are invalid without GMB's approval

1. Scope

This document describes the Product Specification of chargeable Lithium Polymer Battery produced by Guangzhou Markyn Battery Co.,Ltd.

2. Battery pack configuration and function

1. 12210215 battery pack is composed by four parts:

1.1 the plastic part of the battery pack(color、 print、 label content according to customer requirement).

1.2 Cell:

Type:	LI-Polymer
Model:	12210215
Spec:	40Ah
Cell's assemble:	Pile up in series, voltage:37V.

1.3 Module: Important part of the battery pack. It has much function that over-charge protection, over-discharge protection, over-current protection and so on.

1.4 Other parts: the accessories for packing, such as the sponge which is used for fix up, avoiding to drop.

2. Battery (PACK)basic performance

Item		Parameter	Remark
Normal characteristic	Nominal capacity	40Ah	0.2Cdischarge 25±5℃
	Nominal voltage	37V	
Charging Characteristics	Charging method	CC/CV	
	DC input voltage	41~42V	
	Solely DC input charge current	5A±0.1A	Charge the battery only
	Voltage after full charge	41~42V	PACK+;PACK-
	Individual charging time	约 9h	
	Temperature during charging	0℃~+45℃	
Discharge characteristics	Discharge current(standard)	30~31A	
	Cut-off voltage	28~32V	
	Temperature during discharging	-10℃~+60℃	
Impedance		≤180mΩ	After standard charging, measure the resistance of AC1KHz under the

			temperature of 25 ±5°C.PACK+and PACK-port
Protection function	It has the function that is overcharge protection, over-discharge protection, over-current protection and short circuit protection.		
Indicator function	The red is on when charging, the green is on when full charged, there's no light on means no charging.		
Self-discharge	When the battery pack has no load, because of the cell's protect circuit, there's operation current's consume, it causes the battery pack's voltage decreased. Please take care to charge the battery when the storage time is longer, please see the 7item for detailed information.		
Storage temperature	within 1 month	-5 °C~+45°C	Relative humidity 65 ± 20%RH
	within 3 month	-5 °C~+35°C	
	within 6 month	0 °C~+35°C	
Cycle life	Under 25°C, ≥300times		
Battery pack status when shipping	It has been charged 25~35% of capacity when shipping, voltage is 36~39V.		

3. PCM Performance

3.1 Environment

- 3.1.1 Operation temp. -10°C~+45°C relative humidity<80%
- 3.1.2 Storage temp. -20°C~+65°C relative humidity<80%

3.2 Electronic performance parameter

Item	Min.	Typical	Max.	Remark
Overcharge protect voltage(V)	4.225	4.25	4.275	Single cell
Overcharge protect retard time(S)		2		
Overcharge protect resume voltage(V)	4.075	4.1	4.125	Single cell
Over-discharge protect voltage(V)	2.475	2.5	2.525	Single cell
Over-discharge protect retard time (S)		2		
Overdischarge protect resume voltage (V)	2.975	3.0	3.025	
Over-current protect retard time(ms)		10		
◇ The above protect function is for single cell only, when the cells in assembled, as long as any one of the cells reaches to the protect key, all the cells is protected.				

3.3 PCM function

Charging function : The function has only cell circuit protection.

3.3.1 cell protection circuit

3.3.1.1 over-charge: During charging, when the cell's voltage over the overcharge voltage, the overcharge protect circuit worked, and it will be cut when reach to retard time.

Overcharge protection	Protect voltage	4.25V /cell
	Protect retard time	2S
	Protect unchain voltage	4.1V/cell


3.3.1.2 Over-discharge: When battery is over discharged than the over-discharge protect voltage, the over-discharge circuit worked, it will cut the circuit to protect the cell when reach to the retard time.

Over-discharge protection	Protect voltage(single cell, connect to load)	2.5V/cell
	Protect retard time	2S
	Protect unchain condition	charging

3.3.1.3 over-current protection: when the current is over than the over-current, the over-current circuit will work, it will cut the discharge circuit when reach to the retard time.

Over-current protection	Protect current	12A
	Protect retard time	10mS
	Protect unchain condition	Charging

4. Cell assemble drawing

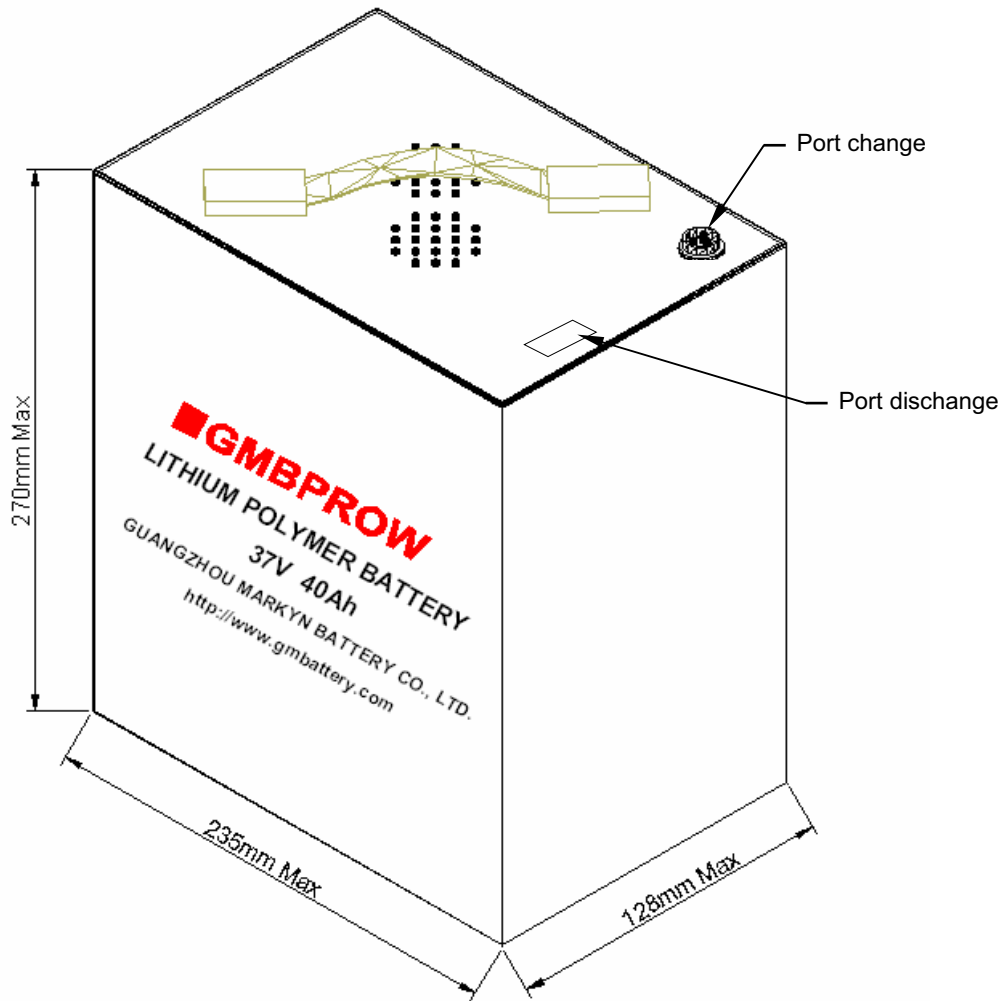

5. Cell parameter index:

1. Single cell parameter

No.	Item	Spec.	Note
1	Model	12210215/40Ah	14PCS
2	Charging voltage	4.20V	
3	Nominal voltage	3.7V	The cell voltage is 3.6V~3.9V when shipping.
4	Rated capacity	≥40Ah @0.2C Discharge	Nominal Capacity refers to the capacity of 0.2C discharge with 2.75V cut-off voltage, after charging by standard method.
5	Cycle Life	≥ 300 Times	One cycle refer to one charge period and then one discharge period. Test condition: Charge current: 0.2C Cut-off voltage: 2.75V The cycle life is the cycle times when the discharge capacity is about 80% of the rated capacity.
6	Self-discharge	Remain capacity> 90%	After standard charging, storied at 5°C±2°C for 30 days, then measure the capacity as Item 4.
7	Impedance	≤8mΩ	After Standard charging, measure the internal resistance with AC1KHz.
8	Max. Charge Current	1CmA (40Ah)	
9	Max. Discharge Current	1CmA (40Ah)	
10	Discharge Cut-off Voltage	2.75V	
11	Operating Temperature	Discharge : -10°C~+60°C Charge : 0°C~+45°C	Cells must be storied at 3.6V-3.9V. During long period storage, cells should be maintained every 90 days.
12	Storage Temperature	within 1 month: -5 °C~+45°C within 3 month: -5 °C~+35°C within 6 month: 0 °C~+35°C	Relative humidity 65 ± 20%RH
13	Cell Weight	Approx 0.85g	
14	Cell Dimension	L : 215mm Max W : 210mm Max T : 12mm Max	Without tabs.

2.Paremeter of battery pair

No.	Item	Spec	Remark
1	Rated capacity	≥40Ah	@0.2CmA Discharge.
2	Nominal voltage	37V	After standard charging, and then discharge according to standard. The average voltage when discharge is the nominal voltage.
3	Assemblage Dimension	Length: 270mm Max Width: 235mm Max Thickness : 128mm Max	Measured with weighting 300gf at 25°C± 5°C Not including battery drawing line.

*Except the special explain, all the tests of this product in the spec is made according to the following condition:
Temperature: 25°C±5°C
Humidity: 65 ± 20%

6. Battery pack Guideline:

Read the guideline carefully, and make sure to use the battery properly. GMB don't take responsibility of the problem for advert the following.

Dangerous!

- Do not throw the cell into fire or heat the cell.
- Do not throw the cell into water or bemoist it, dip in the liquid, such as the seawater, drink, beer.
- Do not use or store the battery in the heat source(such as fire or heater)
- Please use the original charger.
- Do not connect the anode and cathode reversely.
- Do not connect the battery with wall jack or smoke jack.
- Do not short-circuit the battery with wire or other metal objects, don't ship or store with necklace, barrette or other metal objects.
- Do not bump, throw or drop the battery.
- Do not solder the battery terminal directly.
- Do not break up the battery in any way.
- Forbid to charge the battery near the fire source or under hot condition.

Caution !

- Do not put the battery in the micro-wave oven or pressure vessel.
- Do not use the battery with non-rechargeable battery(such as dry battery) or different capacity, model, type battery.
- Do not use the damaged battery.
- There maybe damage during the shipment, if there's any abnormal matter, such as battery's seal is broken or case is broken, smell the electroyte, leakage and so on, this battery can not be used any more.
- Do not use the battery if there is any smell, heating, distortion, color changed or other abnormal situation; you should stop to use if it is in charging; you should beyond fire to avoid fire or explode if there is any leakage or smell.
- Do not wipe but wash the eyes when the electrolyte comes into it, then go to the doctor. The eyes will be harmed if not treat in time.

Notice !

- Don't use the hot battery, such as the shine shining directly or in the car in summer. Otherwise, the battery will hot exceedingly, it may cause fire, and then it will effect battery performance, even decrease the battery life.
- Use the battery on the nominated machine.
- When your children use the battery, please teach them according to the instruction and pay attention to they use it properly.
- If the battery leaked, the electrolyte drop on the skin or clothes, please use running water to clean it immediately, or it may cause chafing.

- Read the battery's setting instruction, install and disassemble the battery properly.
- If the battery terminal is dirty, please wipe it with eraser or dry cloth before using, or it maybe cause the battery disconnection, to lead the capacity consume or can not be charged.

7. Special remind

Please take out the battery and settle it in the cool and dry place if you don't use the battery for long time, or it may cause rustiness or bad performance.

No use for long time, please keep the battery capacity at 50%, it means: not full charged and not full discharge. And re-charge it after 2-3 months(voltage is 36~39V), and use the 50% of capacity. And then, store the battery in dry place and avoid to sunshine directly. In this way, it can avoid the battery damage for long time.

8. Transport

Battery should be shipment at 25~35% of capacity. It should be avoided that shake, impact or extrusion strongly. Prevent to solarization and drench. It should use autocar, traun, plane and so on.

9. Declaration

Guangzhou Markyn Battery Co.,Ltd has right to modify this spec sheet. After modification, we will inform customer with formally documents.