


## CR123A

<b>SPECIFICATION: (23±2°C)</b>	
Nominal capacity ( 1 mA~2V ):	1500MAH
Rated voltage:	3.0 V
Max constant current of discharge:	1500 mA
Max discharge current(pulse):	3000 mA
Weight:	17g
Operating temperature range:	-20~60°C

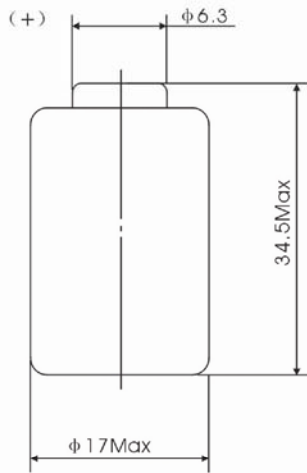

S: Standard termination

**Notes:**

Dimension: mm

Special terminations can be made as requested.

T: Solder tabs




P: Axial pins

**Important Notes**

Do not short or charge the battery.

Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.

Do not heat/use the battery beyond the permitted temperature range.

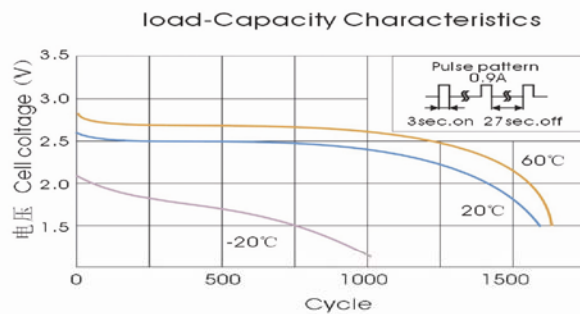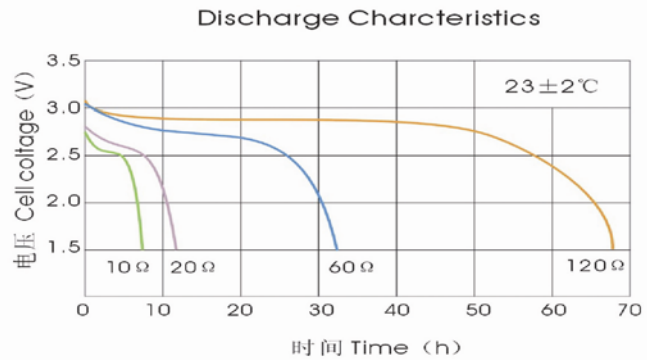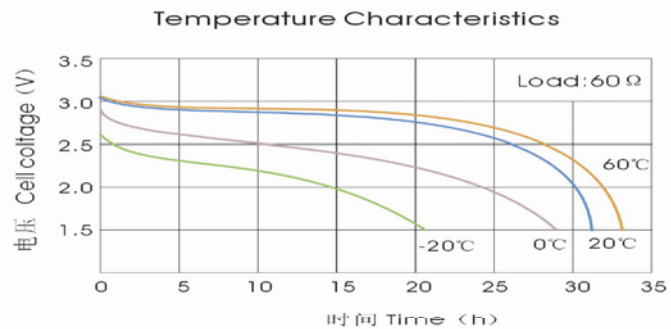

Guangzhou Markyn Battery Co., Ltd.

Makyns , Shixin Road 1100 ,Nancun Town,Panyu District, Guangzhou P.R.C

Tel:(86)20 — 8456 0852 Fax:(86)20 — 3476 7936

Email:sale s@gmbattery.com