


CR2

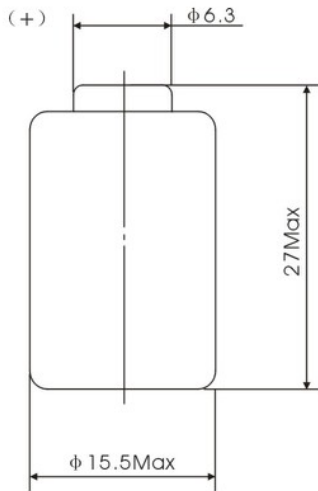

SPECIFICATION: (23±2°C)	
Nominal capacity (10mA~2V):	800MAH
Rated voltage:	3.0 V
Max constant current of discharge:	1000mA
Max discharge current(pulse):	2000mA
Weight:	11g
Operating temperature range:	-20~60°C

S: Standard termination


Notes:

- Dimension: mm
- Special terminations can be made as requested.
- T: Solder tabs
- P: Axial pins


Important Notes

- Do not short or charge the battery.
- Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.
- Do not heat/use the battery beyond the permitted temperature range.


温度特性
Temperature Characteristics

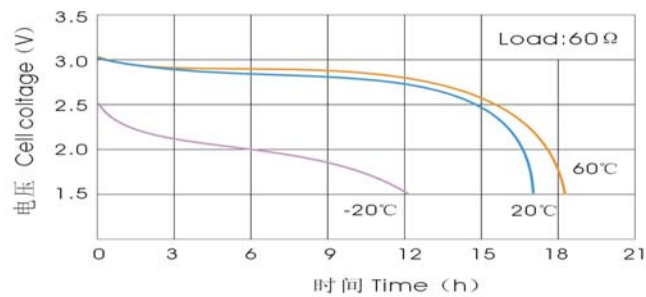

常温负载特性
Discharge Characteristics

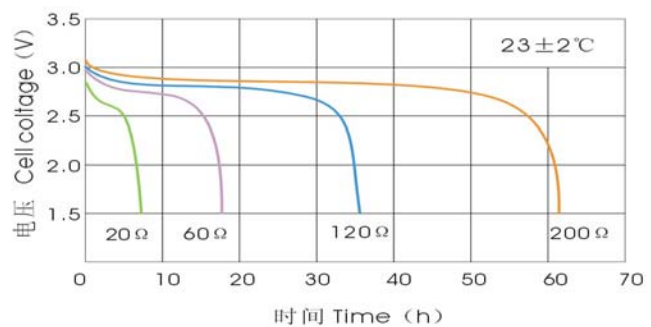

脉冲放电特性
Pulse Discharge Characteristics

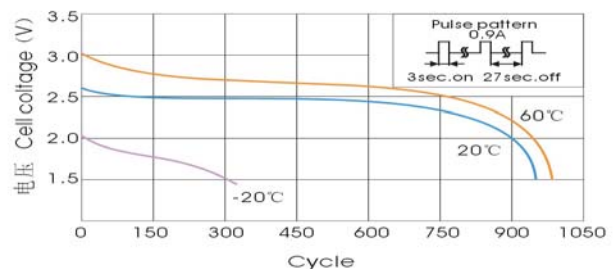

Guangzhou Markyn Battery Co., Ltd.
 Makyns , Shixin Road 1100 ,Nancun Town,Panyu
 District, Guangzhou P.R.C
 Tel:(86)20 — 8456 0852 Fax:(86)20 — 3476 7936
 Email:sale s@gmbattery.com