


CR2

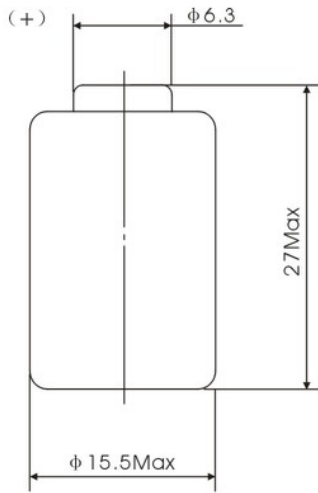

SPECIFICATION: (23±2°C)

| | |
|------------------------------------|----------|
| Nominal capacity (10mA~2V): | 800MAH |
| Rated voltage: | 3.0 V |
| Max constant current of discharge: | 1000mA |
| Max discharge current(pulse): | 2000mA |
| Weight: | 11g |
| Operating temperature range: | -20~60°C |

S: Standard termination


Notes:

- Dimension: mm
- Special terminations can be made as requested.
- T: Solder tabs
- P: Axial pins


Important Notes

- Do not short or charge the battery.
- Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.
- Do not heat/use the battery beyond the permitted temperature range.

温度特性
Temperature Characteristics

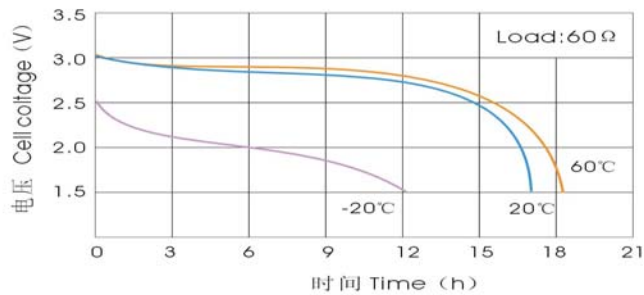

常温负载特性
Discharge Characteristics

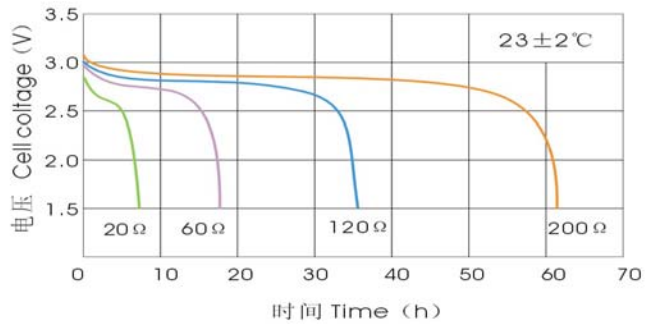

脉冲放电特性
Pulse Discharge Characteristics

