

LITHIUM PRIMARY BATTERIE

ER32L100
3.6V 1700mAh

lithium-thionyl chloride batteries



Cellsizereferences:16UM1,16R20,16D

Electrical characteristics

(Stored for one year or less)

◉ Nominal Capacity 1700 mAh
(1.0 mA to 2.0V, at 25°C)

◉ Nominal voltage 3.6V

◉ Max continuous dischargecurrent 10mA

◉ Max. Pulse current 20 mA
Current value is obtaining 2.0V cell voltage when pulse is applied for 15 seconds at 50% discharge depth at 25°C

◉ Storage temperature 20°C ~ 30°C

◉ Operating temperature -55°C ~ 85°C


◉ Weight(approx) 22g

WARNING:

Fire, explosion and severe burn hazard. Do not recharge, crush disassemble heat above 100°C, incinerate or expose contents to water.

Key features

- High and stable operating voltage
- Low self-discharge rate
Less than 1% after 1 year of storage at 20°C
- Stainless steel container
- Hermetic glass-to-metal sealing
- Non-flammable electrolyte
- Compliant with IEC 86-4 safety standard
- Non-restricted for transport

 UL Component Recognition
File Number MH 45782


Main applications

- TPMS
- Alarms and security system
- Memory back-up
- Tracking system
- Automotive electronics
- Professional electronics
- Computer real-time clocks


.....

LITHIUM PRIMARY BATTERIE


Typical discharge at 25°C

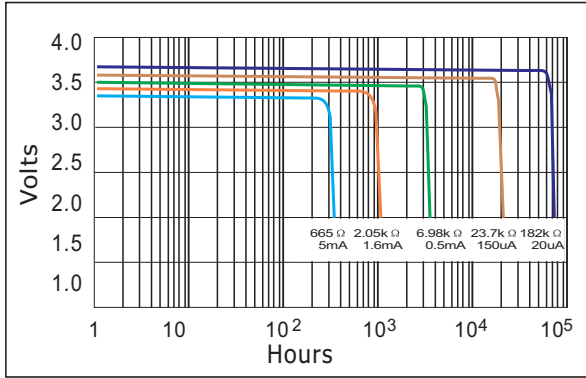

Voltage plateau versus Current and Temperature

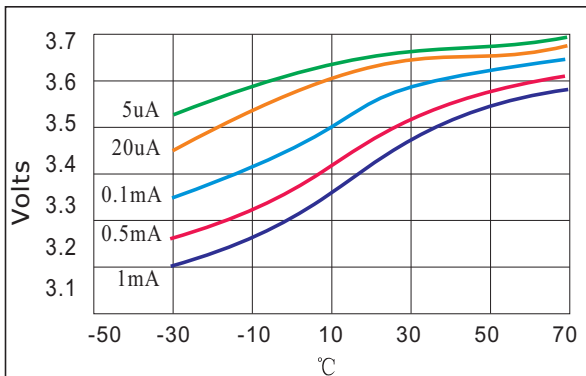


Capacity versus Current and Temperature

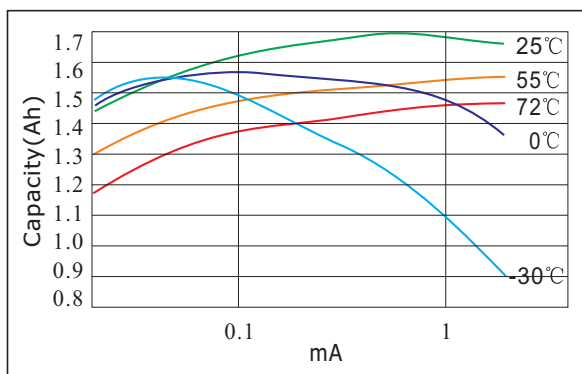

ER32L100

lithium-thionyl chloride batteries

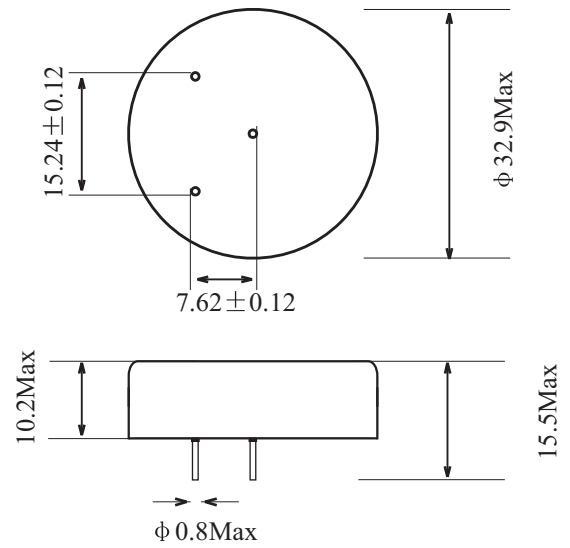

Unit: mm

Available Terminations	
-/P	Axial Pin
-/T /PT2	Radial Pin
-/PT /TP	Polarized Tab