


## ER 14250

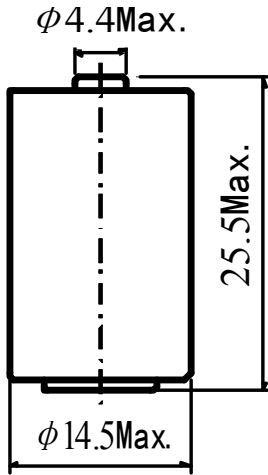

### SPECIFICATION: ( $23\pm 2^\circ\text{C}$ )

Nominal capacity (0.5mA~2V):	1.2 A h
Rated voltage:	3.6 V
Max constant current of discharge:	40mA
Max discharge current(pulse):	80mA
Weight:	11g
Operating temperature range:	-55~85 $^\circ\text{C}$

S: Standard termination

#### Notes:

Dimension: mm

Special terminations can be made as requested.

T: Solder tabs

P: Axial pins


#### Important Notes

Do not short or charge the battery.


Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.

Do not heat/use the battery beyond the permitted temperature range.


### Discharge characteristics at $23\pm 2^\circ\text{C}$

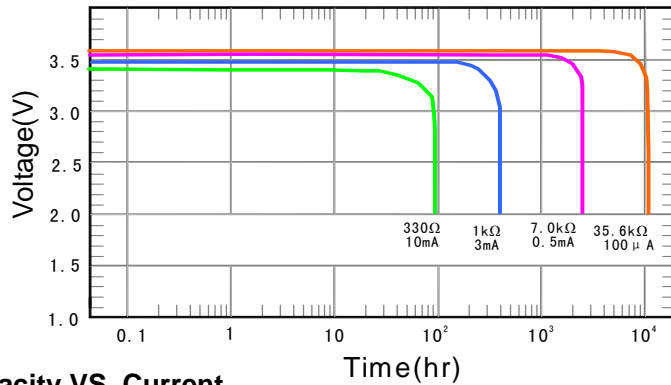

### Capacity VS. Current

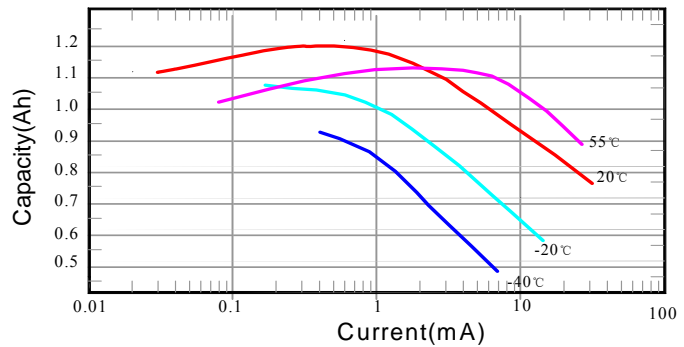

### Voltage VS. Temperature

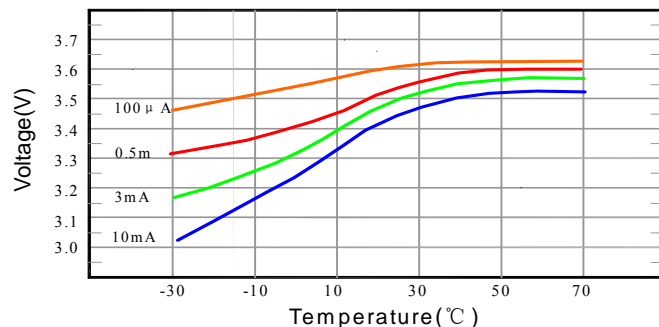

Guangzhou Markyn Battery Co., Ltd.

YiJia Industrial Park, Shixin Road 1100, Nancun Town, Panyu District, Guangzhou P.R.C

Tel:(86)20 — 8456 0852 Fax:(86)20 — 3476 7936

Email:sale s@gmbattery.com

U.L. Component Recognition MH 45782