


## ER 17505M

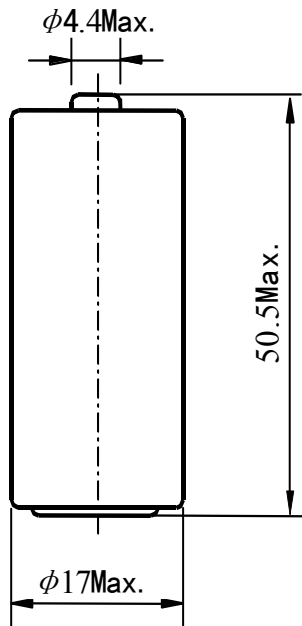

S: Standard termination

**Notes:**

- Dimension: mm
- Special terminations can be made as requested.
- T: Solder tabs
- P: Axial pins


**Important Notes**

- Do not short or charge the battery.
- Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.
- Do not heat/use the battery beyond the permitted temperature range.


**SPECIFICATION: (23±2°C)**

Nominal capacity (10mA~2V):	2.8Ah
Rated voltage:	3.6V
Max constant current of discharge:	600mA
Max discharge current(pulse):	1200mA
Weight:	28g
Operating temperature range:	-55~85°C


**Discharge characteristics at 23±2°C**

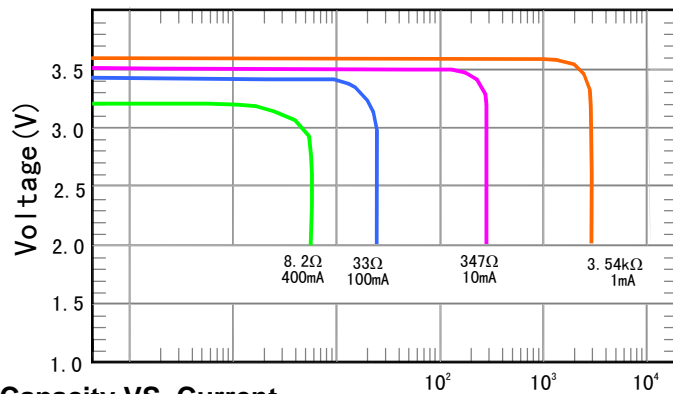

**Capacity VS. Current**

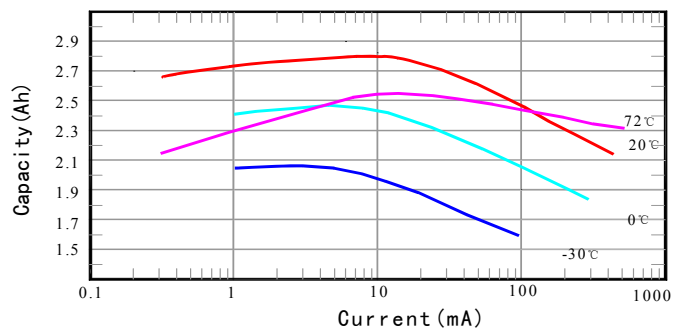

**Voltage VS. Temperature**

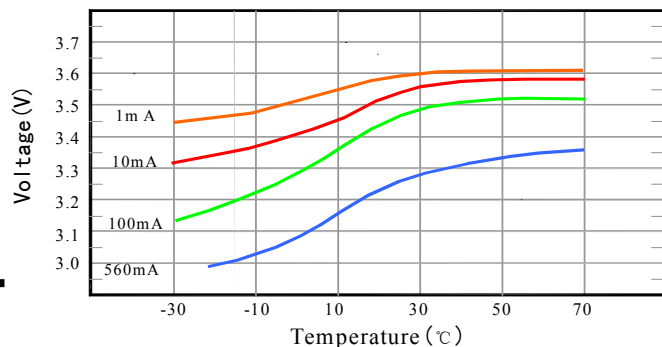

Guangzhou Markyn Battery Co., Ltd.

YiJia Industrial Park , Shixin Road 1100 ,Nancun Town,Panyu District, Guangzhou P.R.C

Tel:(86)20 — 8456 0852 Fax:(86)20 — 3476 7936

Email:sales@gmbattery.com

U.L. Component Recognition MH 45782