



ER346 15M

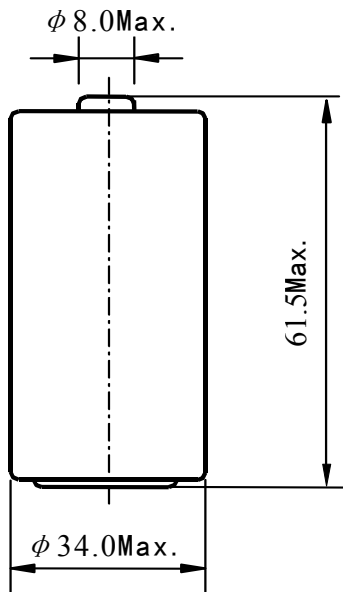

SPECIFICATION: (23±2°C)

Nominal capacity (10mA~2V):	14.0Ah
Rated voltage:	3.6 V
Max constant current of discharge:	2000mA
Max discharge current(pulse):	3000mA
Weight:	118g
Operating temperature range:	-55~85°C

Discharge characteristics at 23±2°C

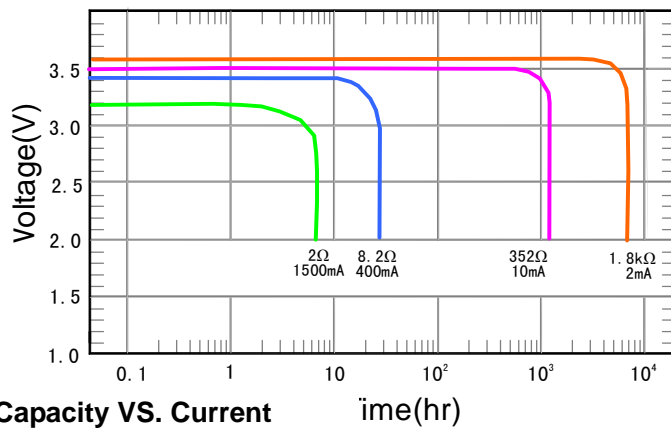

Capacity VS. Current Time(hr)


S: Standard termination

Notes:


- Dimension: mm
- Special terminations can be made as requested.
- T: Solder tabs
- P: Axial pins

Important Notes

- Do not short or charge the battery.
- Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.
- Do not heat/use the battery beyond the permitted temperature range.

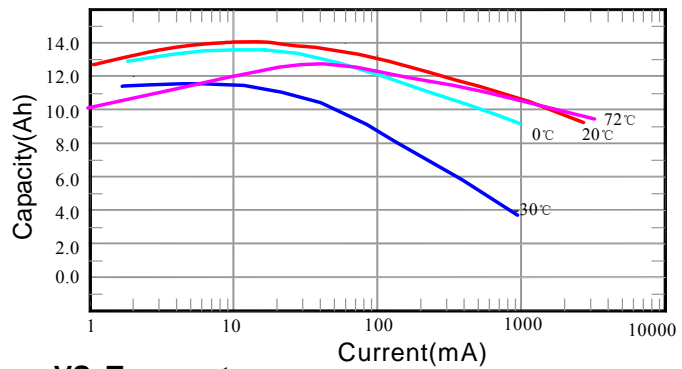

Voltage VS. Temperature

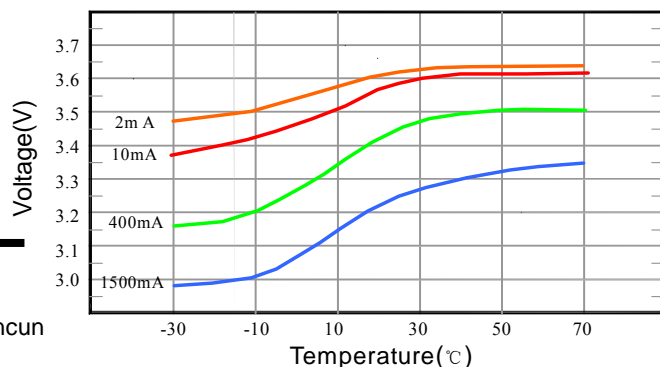

Guangzhou Markyn Battery Co., Ltd.

YiJia Industrial Park , Shixin Road 1100 ,Nancun Town, Panyu District, Guangzhou P.R.C

Tel:(86)20 — 8456 0852 Fax:(86)20 — 3476 7936

Email:sale s@gmbattery.com

U.L. Component Recognition MH 45782