

LITHIUM PRIMARY BATTERIE



# ER26500S 3.6V 4200mAh

lithium-thionyl chloride batteries

Cell size references:C

Electrical characteristics

(Stored for one year or less)

Nominal Capacity (4mA to 2.0V, at 25°C)	6000mAh
Nominal voltage	3.6V
Max continuous discharge current	200mA
Max. Pulse current Current value is obtaining 2.0V cell voltage when pulse is applied for 15 seconds at 50% discharge depth at 25°C	300mA
Storage temperature	20°C ~ 30°C
Operating temperature	0°C ~ 150°C
Weight(approx)	52g

WARNING:

Fire, explosion and severe burn hazard. Do not recharge, crush, disassemble, heat above 150°C, incinerate or expose contents to water.

Key features

- High and stable operating voltage
- Low self-discharge rate  
Less than 1% after 1 year of storage at 25°C
- Stainless steel container
- Hermetic glass-to-metal sealing
- Non-flammable electrolyte
- Compliant with IEC 86-4 safety standard
- Restricted for transport (Level 9)

Main applications

- COMS memory and RTC backup
- Alarms and security system
- Toll tags and RFID transponders
- Tracking system
- Automotive electronics
- Professional electronics
- Computer real-time clocks



.....

LITHIUM PRIMARY BATTERIE

# ER26500S

lithium-thionyl chloride batteries

## 1. Discharge characteristics (+150°C)

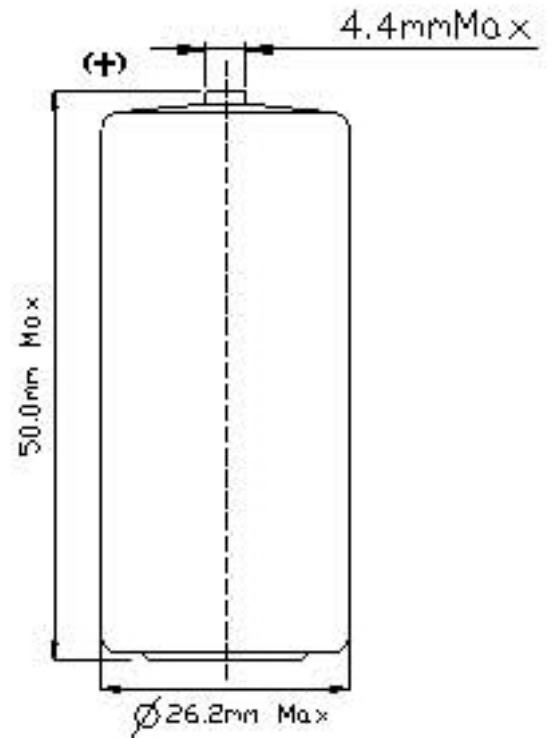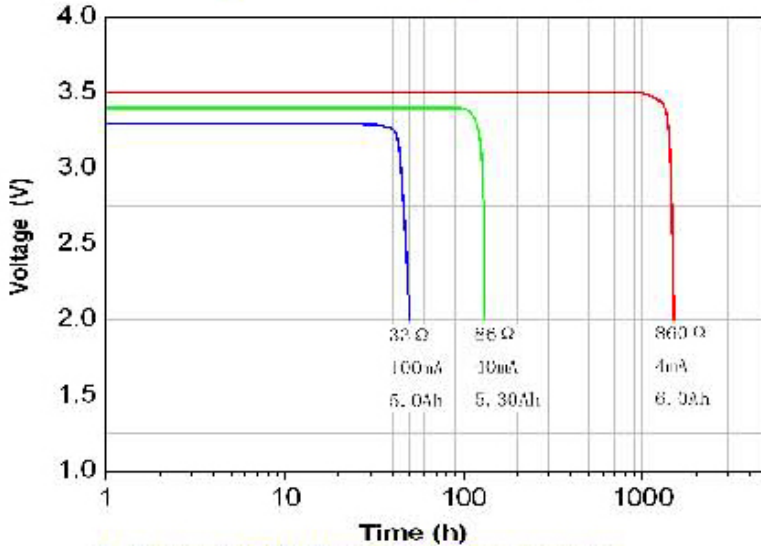

Unit: mm

## 2. Capacity VS. Current & Temperature

