


Please contact GMB for specification: info@gmbattery.com

1、 GMB PE battery pack

Specifications:


- 192mm total length
- 49mm height
- maximum current 500mA
- a group voltage 64.8 V

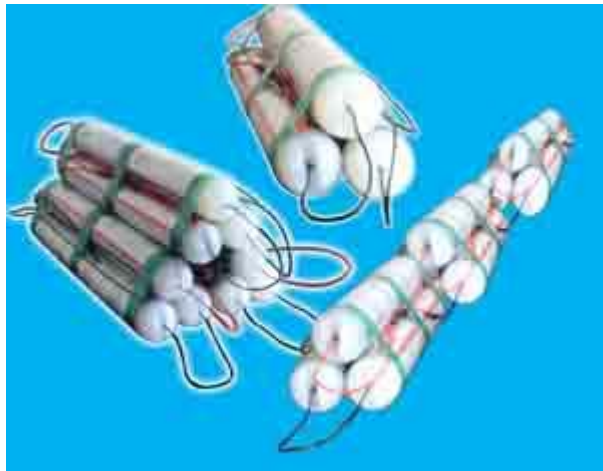

2、 GMB GEOLINK battery pack

Specifications:


- the length of steel, glass for 1265 mm
- the glass tube diameter for the $\Phi 37.2 \text{ mm} \pm 0.1 \text{ mm}$
- glass steel tube slot width of 12mm
- and the weight of the battery for 1.53 kg
- and the battery voltage 36V group
- and the working time of the batteries in 180h acuity
- and the two of 27mm loads

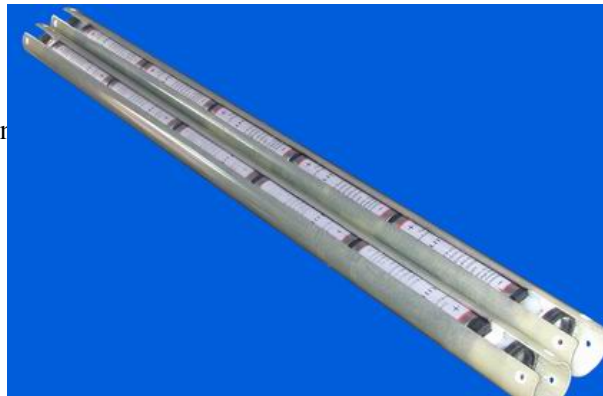

3、 GMB SDI battery pack

Specifications:

- 2712mm total length
- 36mm diameter
- Total voltage 57.6 V
- The maximum current 1400mA
- The maximum bending degree 2°

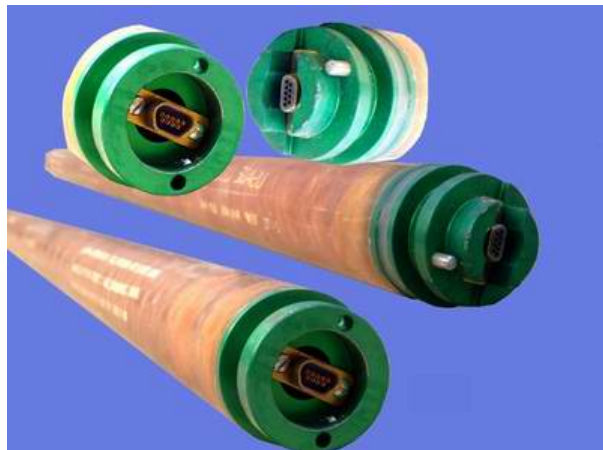

4、 GMB MWD-QDT I battery pack

Specifications:

- Glass tube length 1118mm
- Diameter 37.8mm
- Length of battery wire 260mm
- a group voltage 28.8-29.2 V



5、GMB MWD-QDT III battery pack

Specifications:

- Glass tube length 1118mm
- Diameter 37.8mm
- Length of battery wire 350mm
- a group voltage 28.8V~29.2V



6、GMB MWD-QDT VI battery pack

Specifications:


- Glass tube length 1204mm
- Diameter 37.8mm
- Length of battery wire 350mm
- a group voltage 14V



7、GMB MWD-QDT V battery pack

Specifications:

- Glass tube length 762mm
- Diameter 54mm
- a group voltage 36V

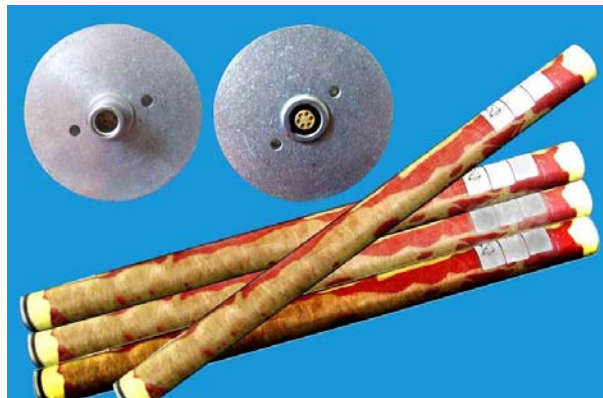

8、GMB MWD-QDT VI battery pack

Specifications:

- Glass tube length 636mm
- Diameter 37.8mm
- Length of battery wire 350mm
- a group voltage 28.8V



8、 GMB Slim-one battery pack

Specifications:

- 2712mm total length
- 33mm height
- maximum current 1400mA
- a group voltage 57.6 V

