


601745

Items		Normal	Remark
Capacity	Typ.	390mAh	0.2CmA(74mA) discharge
	Min.	370mAh	
Voltage		3.7V	0.2CmA(74mA) average voltage
Internal Resistance		≤60mΩ	
Power Off Voltage		2.75V	
Charging Current		370mA	Standard charging
Maximum Charging Voltage		4.25V	
Charging Time		Approx 2.5h	370mA charging
Maximum Charging Current		555mA	1.5CmA
Maximum Discharge Current		740mA	2.0CmA
Approximate Weight		about 7g	
Operating Temperature and Humidity	Charging	0~+45°C	
	Discharge	-20~+60°C	
Storage Temperature	<1 month	-20~+45°C	Recommended storage temperature during transportation is at 23°C
	>6 months	-20~+35°C	

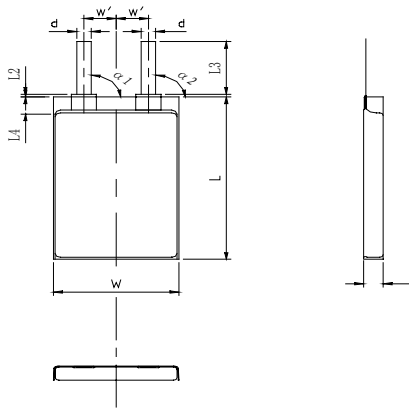

Items	Dimension
T (Max.)	6mm
W (Max.)	17.5mm
L (Max.)	45.5mm
L2	1.25±0.75mm
L3	9±1mm
L4	3~4mm
W'	6±1mm
d	5mm
a1	90±5°
a2	90±5°

T: Thickness W': Center Length
 W: Width d: Tab Width
 L: Length a1: Tab Angle
 L2: Tape Height a2: Tab Angle
 L3: Tab Height L4: Tab Edge Width



Figure 1 Charge & Discharge Characteristic



Figure 2 Discharge Characteristic

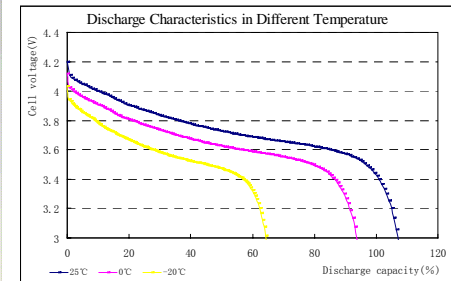


Figure 3 Discharge Characteristic in Different T



Figure 4 Discharge Cycle Characteristic