

**LITHIUM PRIMARY BATTERIE**



**WR 26500**  
**2.9V 3500mAh**

lithium sulfur dioxide batteries(li/so2)

**Electrical characteristics**

(Stored for one year or less)

◉ Nominal Capacity (30mA to 2.0V, at 25°C)	3500mAh
◉ Nominal voltage	2.9V
◉ Max continuous discharge current	2000mA 4000mA
◉ Operating temperature	-54°C ~ 65°C

**Key features**

- High and stable operating voltage
- Low self-discharge rate  
Less than 1% after 1 year of storage at 20°C
- Stainless steel container
- Hermetic glass-to-metal sealing
- Non-flammable electrolyte
- Compliant with IEC 86-4 safety standard
- Non-restricted for transport

**Main applications**

- TPMS
- Alarms and security system
- Memory back-up
- Tracking system
- Automotive electronics
- Professional electronics
- Computer real-time clocks


.....

**LITHIUM PRIMARY BATTERIE**

**WR 26500**

lithium sulfur dioxide batteries(li/so2)

**Dimensions:**

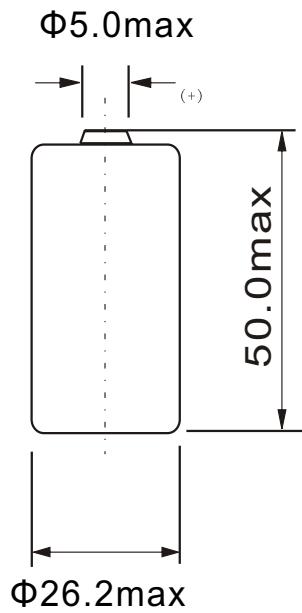

Unit: mm

Available Terminations	
-/P	Axial Pin
-/T /PT2	Radial Pin
-/PT /TP	Polarized Tab

**Typical discharge at 25°C**

