



ER26500

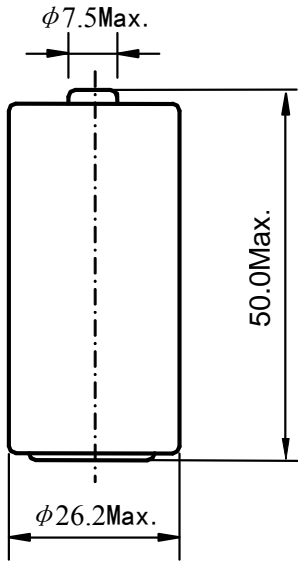

SPECIFICATION: (23±2°C)

Nominal capacity (3mA~2V):	8.5Ah
Rated voltage:	3.6 V
Max constant current of discharge:	130mA
Max discharge current(pulse):	400mA
Weight:	53g
Operating temperature range:	-55~85°C

Discharge characteristics at 23±2°C

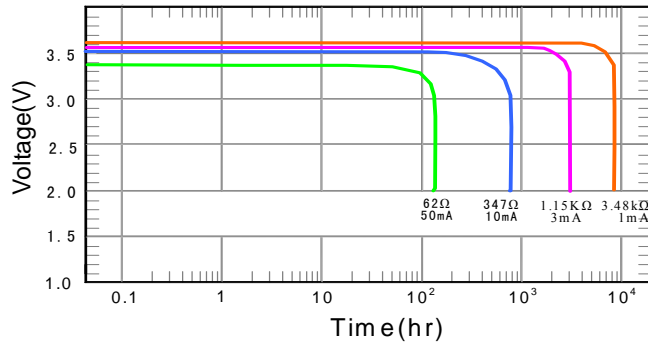

S: Standard termination

Notes:

Dimension: mm

Special terminations can be made as requested.

T: Solder tabs

P: Axial pins


Important Notes

Do not short or charge the battery.


Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.

Do not heat/use the battery beyond the permitted temperature range.

Capacity VS. Current

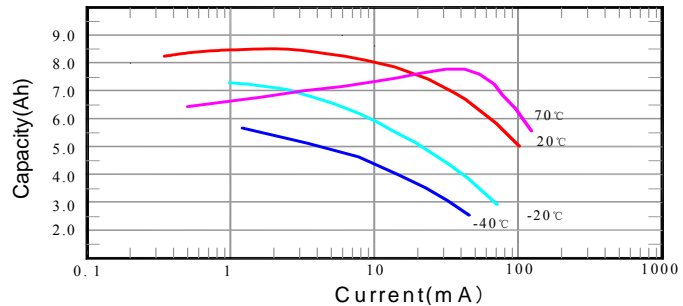

Voltage VS. Temperature

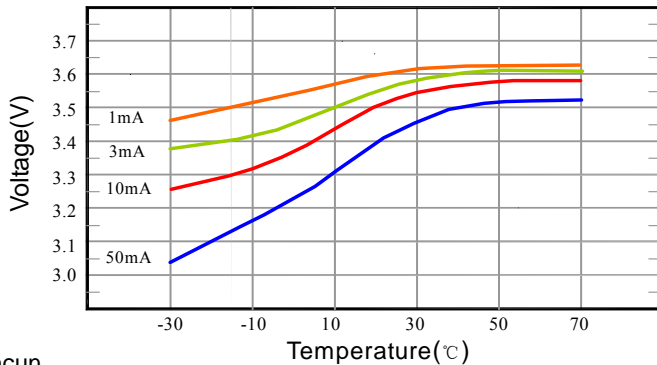

Guangzhou Markyn Battery Co., Ltd.

YiJia Industrial Park, Shixin Road 1100, Nancun Town, Panyu District, Guangzhou P.R.C

Tel:(86)20 — 8456 0852 Fax:(86)20 — 3476 7936

Email:sale s@gmbattery.com

U.L. Component Recognition MH 45782